### Print No. 8019843/0

D) What is not covered This warranty does not cover any damage caused by product misuse, abuse or failure to follow instructions provided herein for proper use, maintenance, cleaning or storage. This warranty also does not cover, and expressly excludes coverage for, any incidental or consequential damages arising out of the purchase, use or performance of the product. Some state laws do not allow exclusion or limitation of incidental or consequential damages, so the above exclusion or limitation may not apply to you.

This warranty lasts two years from the date of purchase of your Katadyn an implied warranty lasts, so the above limitation may not apply to you. C) What Katadyn will do

In the event of a defect in material or workmanship within the two-year

warranty period, Katadyn will either repair or replace your Katadyn

BeFree<sup>™</sup>, at Katadyn's sole discretion.

from the date of purchase. Some states do not allow limitations on how long

BeFree™. All implied warranties under state law are also limited to two years

B) How long warranty coverage lasts

workmanship.

Your Katadyn BeFree™ is warranted to be free from defects in materials and

# A) What is covered

2 YEAR LIMITED WARRANTY on Katadyn BeFree™

new EZ-Clean Membrane<sup>TM</sup> by screwing it into the Hydrapak<sup>®</sup> SottFlask<sup>TM</sup> in a

and remove the EZ-Clean Membrane<sup>1M</sup> from the Hydrapak<sup>®</sup> SottFlask<sup>1M</sup>. Install

Katadyn BeFree<sup>rm</sup> Replacement EZ-Clean Membranes<sup>rm</sup> are available trom the

or it water flow has slowed or stopped (review Performance Tips to ensure best

extend life of your EZ-Clean Membrane™, clean it regularly. For optimum filter performance replace the EZ-Clean Membrane™ after 1000 liters or 264 gallons

IMPORTANT: Do not rinse the EZ-Clean Membrane<sup>TM</sup> horizontally under

system with 2 liters of filtered or treated water to remove any stale tasting water.

Note: When removing the Katadyn BeFree<sup>TM</sup> from long-term storage, flush the

D) Disassemble all components, rinse them with tiltered or treated water and

The life span of the EZ-Clean Membrane<sup>TM</sup> depends on water quality. To

To replace your EZ-Clean Membrane<sup>TM</sup> twist it in a counter-clockwise motion

деары мнеке хол brichased your Katadyn BeFree<sup>TM</sup>.

geplacement EZ-Clean Membrane<sup>TM</sup> Installation

running water. (See WARNING section)

E) Reassemble the system and store inside carry bag.

allow them to air dry completely.

### 10 KATADYN BEFREE™ LIMITED WARRANTY

# KATADYN BEFREE™ LIMITED WARRANTY

# (CONTINUED)

### F) How to get service

Katadyn Customer Service by telephone, email or in writing at:

Katadyn Products Inc.

Phone: +41 44 839 21 11

customerservice@katadyn.ch

which vary from state to state.

Pfäffikerstrasse 37

) How state law applies

8310 Kemptthal

Switzerland

If you are not completely satisfied with the service you receive from your

retailer, or if you have any questions regarding this warranty, please contact

This warranty gives you specific legal rights. You may also have other rights

IOCKWIZE MOTION.

broduct performance).

PERFORMANCE TIPS (CONTINUED)

hoses, Hydrapak® SoftFlask™ etc.

growth within the tilter system

EZ-Clean Membrane<sup>TM</sup>.

running water. (See WARNING section)

through EZ-Clean Membrane<sup>in</sup> (into sink or container) to disintect tilter,

C) Hang your Katadyn BeFree and allow the entire amount of solution to run by screwing the filter cap (with EZ-Clean Membrane<sup>TM</sup>) clockwise.

A) Fill a container with filtered or treated water and add 1 Micropur Tablet.

Disinfect your Katadyn BeFree<sup>TM</sup> before storage to prevent microbiological

B LONG TERM STORAGE (AFTER YOUR TRIP IS OVER)

pose and squeeze the Hydrapak $_{\mbox{\tiny SO}}$  SoftFlask $_{\mbox{\tiny TM}}$  until the air goes through the

the system and disconnect output hose. Shake the system, reconnect output

Fill the Hydrapak® SottFlaskTM with a small amount of tresh water, close

> On extended trips, bring along an EZ-Clean Membrane<sup>TM</sup> Replacement.

IWPORTANT: Do not rinse the EZ-Clean Membrane<sup>TM</sup> horizontally under

D) Trapped air in the EZ-Clean Membrane<sup>TM</sup> may also reduce flow rates.

t these steps tail to restore water flow, replace EZ-Clean Membrane<sup>TM</sup>.

B) Pour the solution into the Hydrapak® SottFlaskim. Close the system

(It not available, use 4 drops of ordinary household bleach.)

DO NOT allow the filter cap and top of the filter to contact contaminated water

Remove the filter and swish in any fresh water source to clean in the field (Note:

ill the Hydrapak SoftFlask TM with fresh water & shake to easily clean the EZ-

Clean EZ-Clean Membraneim: Use ONE of the EZ Clean steps (Shake, Swish)

system with the first liter of treated water when you start filtering water again.

the hose with tiltered/treated water. It clean water is unavailable, tlush the

sediment from connection. Add the output hose and flush the filter cap and

Clean Membrane<sup>IM</sup>. Swish filter cap in filtered/treated water to remove any

Clogged Outlet Valve: Unscrew the filter cap counterclockwise from the EZ-

is securely connected to the quick connect on the filter cap or water will not

Check Output Hose: Ensure on/off output hose valve is in the wide open

position, not pinching the hose whatsoever. Ensure output hose quick connect

printed on the outside of the Hydrapak® SoftFlask<sup>TM</sup>:

Please take a moment to register your new Katadyn product by completing the short product registration form online at www.katadyn.com. The information you provide will enable us to better serve you with products developed to meet your needs and interests

Please register your Katadyn product online at www.katadyn.com (under

service section) and you will be automatically entered into a drawing to win a

free Katadyn Group product. We will keep you informed of new products from

Up to 2L of water per minute

Up to 1,000L, depending on water quality

Katadyn, Optimus and our dehydrated food brands (see our website for more

to the retailer where you purchased the product for repair or replacement.

**12** PRODUCT SPECIFICATIONS

192 g

23 x 7.5 x 44.7 cm

details).

Flow Rate

Weight:

Dimensions

Filter Capacity:

# PRODUCT REGISTRATION & SPECIFICATIONS

To receive coverage under this warranty, please return your Katadyn BeFree™

C) It water flow is slow:

flow into output hose.

lsacino

usimo

Shake

Clean Membrane<sup>TM</sup> in the tield

### tresh water source. Avoid still water or water in areas of heavy human or Jo exteud the life of your EZ-Clean Membrane<sup>TM</sup>, always use the best available

**KATADYN GROUP** 

Log on to our website to learn more about our full line of products including

Katadyn, Optimus Stoves and Trek'n Eat Foods.

www.katadyn.com

www.optimusstoves.com

www.trekneat.com

www.spectrawatermakers.com

Katadyn Products Inc.

Pfäffikerstrasse 37

8310 Kempttha

Phone: +41 44 839 21 11

customerservice@katadyn.ch

Switzerland

### It you suspect that your Katadyn BeFree<sup>τM</sup> may have been damaged in Filter Integrity Test





areas where treated water is unavailable. and Cryptosporiatium). It is for hiking, camping in the wilderness or traveling in pacteria (99.9999% Klepsiella terrigena) and protozoan cysts (99.9% Giardia Lotection Agency's microbiological water purifier standards for reduction of tresh water sources to make it sater for drinking. It meets the U.S. Environmenta gesidueg to reduce the levels of bacteria and protozoan cysts commonly found in accordance with the instructions provided in this manual, this product is (μειειυαιτει καταγία το αν καταγία βεγεείω). When used properly in Congratulations on your purchase of the Katadyn Gravity BeFree<sup>TM</sup> 3.0L

disintected water Treated water = Treated tap water or chemically disinfected water, or boiled Filtered fresh water = Potable drinking water Fresh water = Untreated water (Lakes, Rivers, Streams, etc.) Mater definitions as used in this manual



auiwaj nze.

2torage) 3. Clean output hose after integrity test according to section 8 (Long Term 2tob: DO NOI NZE EIFLEKi Keblace EZ-Clean Wembrane<sup>TM</sup> -> can blow through filter = fiber broken -> cannot blow through filter = fiber ok 2. Try to blow air - using your mouth - through the output hose into the Hydrapake SoftFlask  $^{\rm TM}$ IMPORTANT: The integrity test only works with a wet EZ-Clean . Squeeze tresh water through the Katadyn BeFree<sup>TM</sup> some way, you can pertorm this quick and easy integrity test in the field.

straight on the thread of the Hydrapak  ${}_{\otimes}$  SoftFlask  ${}^{\tau \mathsf{M}}$  and tighten it firmly. Unscrew the filter and screw it back on. Make sure that you position the filter ∀) If the Katadyn BeFree<sup>TM</sup> leaks near the cap Maintain your Katadyn BeFree<sup>TM</sup> to keep it operating properly.

perform the filter integrity test to make sure the fibers are ok. B) If the Katadyn BeFree<sup>TM</sup> is dropped hard, check the hollow fibers visually and

fingers. (See WARNING section) IMPORTANT: Do not touch the hollow tibers with a tool or with your

## 2 WARNINGS

Using the Katadyn BeFree™ improperly or drinking untreated water can result in exposure to harmful microorganisms and an increased risk of diseases. Reduce your risk of becoming sick by following the warnings and instructions in this manual and by educating yourself on backcountry/travel illness prevention. YOU ARE RESPONSIBLE FOR YOUR OWN SAFETY AND THOSE IN YOUR GROUP. PLEASE USE GOOD JUDGEMENT.

Improper use of the Katadyn BeFree™ or use of a damaged or contaminated EZ-Clean Membrane™ expose you to harmful microorganisms and increase your risk of contracting a gastrointestinal illness. Read this entire manual before assembling or using the Katadyn BeFree™ and follow all instructions carefully. If you have any questions, contact Katadyn at +14 839 21 11 or email us at customerservice@katadyn.com

- The Katadyn BeFree™ does not remove viruses.
- Never use the Katadyn BeFree™ to filter seawater or brackish water or chemically contaminated water, such as water from mine tailing ponds or near large agricultural operations. The Katadyn BeFree™ does not make drinkable water from these sources and does not remove chemicals and radioactive materials or particles smaller than 0.1 microns.
- Do not use in freezing conditions (a frozen EZ-Clean Membrane™ could lead to microorganism bypass, resulting in illness)
- Improper threading of the cap to the Hydrapak<sup>®</sup> SoftFlask<sup>™</sup> could cause fluid leakage and result in illness.
- Do not hold or squeeze the EZ-Clean Membrane™ with your hand while opening or closing the Katadyn BeFree™ (as showing in the diagram on the next page). Carefully hold the thread of the flask (under the bail handle) when opening or closing the Katadyn BeFree™, allowing the EZ-Clean Membrane™ to rotate freely inside the flask. Holding or squeezing the EZ-Clean Membrane™ while opening or closing the Katadyn BeFree™ could result in damage or breakage to the filter membrane, thus compromising/ damaging the filter (which could allow harmful microorganisms to bypass the filter, leading to illness).

### 2 WARNINGS (CONTINUED)



Membrane<sup>™</sup> horizontally

doing so may destroy the

under running water –

hollow fibers

Do not hold or squeeze the EZ-Clean Membrane™ with your hand while opening or closing the Katadyn BeFree™



Do not touch the hollow fibers with a tool or with your fingers.

## 2 WARNINGS (CONTINUED)

If the Katadyn BeFree™ has been dropped into a fresh water source, follow instructions for long term storage to completely disinfect filter before use. If the Katadyn BeFree™ is damaged or contaminated, do not use. Do not allow fresh water to contaminate the output parts (female quick connect and top of the EZ-Clean Membrane™).

To minimize risk, when filtering water, do not splash dirty or fresh water on the filter cap. Do not drink directly from the output hose. Dry off outside of Hydrapak® Soft Flask™ and output hose to avoid fresh

water running down bag/hose into your water container. Do not filter any substance or liquid other than fresh water through your Katadyn BeFree™ or the EZ-Clean Membrane™ may become damaged or contaminated

Before long term storage, disinfect the EZ-Clean Membrane™ thoroughly to prevent growth of mold, mildew and bacteria which could cause illness (see Long Term Storage)

Do not use dishwasher or microwave to disinfect the EZ-Clean Membrane™ or the filter cap. Doing so will damage or melt the parts from high heat. The Hydrapak® Soft Flask™ can be put in the dishwasher on the top rack. Always seek the best fresh water source available. Always handle the Katadyn BeFree™ filter carefully.

Extend your filter's lifespan by using one of the following EZ Clean options: SHAKE or SWISH every 5 liters (see Performance Tips). On extended trips, bring along a Katadyn Replacement EZ-Clean Membrane™.

READ, UNDERSTAND AND FOLLOW ALL instructions and warnings in this manual before using the Katadyn BeFree™. Failure to follow all warnings and instructions may result in exposure to harmful microorganisms and illness.

## **3** IMPORTANT SAFETY MESSAGE

### Read before using Katadyn BeFree™

When you travel abroad, camp or backpack, you run the risk of illness ranging from the inconvenience and discomfort of diarrhea to more serious illnesses caused by protozoan cysts (i.e., Giardia, Cryptosporidium), viruses and bacteria.

The microorganisms that cause these diseases are often found in the food and water you consume.

Lakes, rivers, streams and the local water supply may also be contaminated. To minimize the risk of contracting these illnesses, we suggest that you consult with your physician, state health department or travel clinic 4-6 weeks before you depart.

And while you are traveling, make sure that prepared food is thoroughly cooked according to its specified instructions. Select non-cooked foods (fruits, nuts, etc.) that have intact shells or skins, and always sanitize your hands properly before peeling the food. Wash your hands with soap and warm water thoroughly and often (and use hand sanitizer), especially before you eat or prepare food. Also, in groups encourage everyone to wash their hands frequently. Microorganisms can spread to communal gear from one group member not sanitizing their hands properly. Do not share personal items (i.e. lip balm, eating utensils, toothbrushes, water bottles or bite-valves on hydration bladders). Make sure all food is properly prepared and thoroughly cooked. Filter all drinking water with your Katadyn BeFree™, including water used for brushing teeth, washing your face, etc. according to the instructions in this manual.

If there is any risk of viruses in the water, use an EPA-registered disinfectant such as Katadyn Micropur MP1 Purification Tablets or Micropur Forte (MF 100F), in combination with the Katadyn BeFree™ (Note: Follow all instructions for proper use of Micropur MP1 or Micropur Forte (MF 100F) and wait the appropriate treatment time) or boil your water (must bring to a rolling boil for approx. 1 minute) (Note: The Katadyn BeFree™ does not remove viruses).

# 5 PRODUCT SETUP


The Katadyn BeFree™ requires minimal setup. For best results, try out the product before first use and familiarize yourself with its operation.

- 1. Assemble the Katadyn BeFree™ as shown in figure 1.
- Flush system by running filtered or treated water through the EZ-Clean Membrane™ (hollow fiber) to remove harmless particles and dust. See following section on Normal Operation on how to filter water.

### 6 NORMAL OPERATION

A) Open the system by holding it at the thread of the Hydrapak<sup>®</sup> Soft Flask<sup>™</sup> (under the bail handle) and unscrew the EZ-Clean Membrane<sup>™</sup> counterclockwise (blue ring) (see figure 2).


 ${\rm IMPORTANT:}$  Do not hold or squeeze the EZ-Clean Membrane^TM with your hand while opening or closing the Katadyn BeFree^TM



### **6 NORMAL OPERATION (CONTINUED)**

B) Fill the Hydrapak<sup>®</sup> Soft Flask<sup>™</sup> with fresh water (not salt or brackish water) from the best water source available (such as clear lakes, rivers, streams, faucets or fountains). Use the handle and/or bail handle to fill the Hydrapak<sup>®</sup> Soft Flask<sup>™</sup> (see figure 3).

IMPORTANT: Dry off outside of Hydrapak® Soft Flask™ and output hose to avoid fresh water running down flask/hose into your water container.

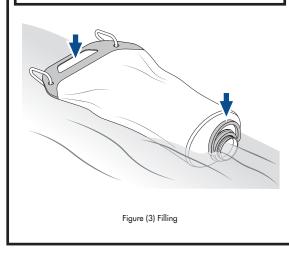

## **6 NORMAL OPERATION (CONTINUED)**

C) Close the system by screwing filter clockwise onto the Hydrapak<sup>®</sup> Soft Flask™ ensuring a proper thread seal and avoiding cross-threading which could lead to bypass, ensuring a tight seal (see figure 4).





Figure (4) Closing

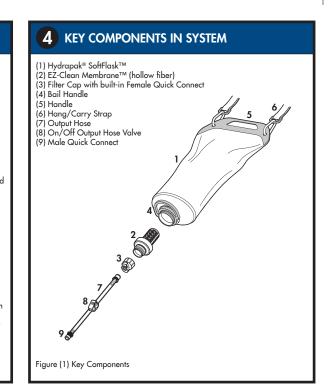

### 6 NORMAL OPERATION (CONTINUED)

D) Elevate Hydrapak<sup>®</sup> Soft Flask™ in convenient location. For best flow, position the filter in an upright position and hang from the highest possible location. (see figure 5).




Figure (5) Elevating

E) Close the on/off output hose valve. Connect the output hose to the female quick connect at the filter cap (this will initiate water flow into the output hose). Open on/off output hose valve to begin water flow. Let the water flow into a water container, drink bladder or similar. Close on/off output hose valve to stop water flow. Ensure on/off output hose valve is in wide open position (not pinching hose whatsoever) while filtering to ensure maximum flow rate.